




CZ01 Floating System

Description - Dycem’s Cleanzone floating systems are suitable in locations where long term adhesion to the sub-floor is not possible. The Floating system is ideal for a range of smooth and rough sub-floors and is easily self-installed in a matter of minutes, eliminating the need for any lengthy installations.

Application - The product is pre-assembled and adhered onto a 1/16” thick isolator membrane and comes complete with cold welded edging to the Dycem material, ensuring a strong bond during its life-cycle.

The underside of the floating floor system is an impervious vinyl layer resistant to moisture, which is non-absorbent and contains multiple peduncles, in order to minimize sub-floor show through and maintain rigidity of the Dycem product.

This also ensures the product has a firm grip on the sub-floor when in use.

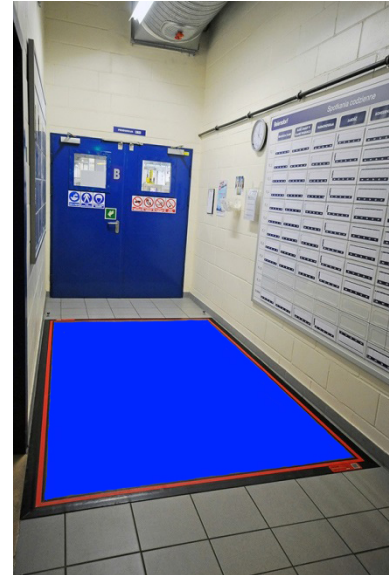

Please allow 3/16” height tolerance for door clearance and width/length tolerance

Product Code	Description	Size width x length (ft)	Price
CZ01FS1210XX	CZ01 Floating Floor System	4' x 4'	Call for quote
CZ01FS1220XX	CZ01 Floating Floor System	4' x 6'	Call for quote
CZ01FS1225XX	CZ01 Floating Floor System	4' x 8'	Call for quote
CZ01FS1230XX	CZ01 Floating Floor System	4' x 10'	Call for quote
CZ01FS1240XX	CZ01 Floating Floor System	4' x 12'	Call for quote
CZ01FS2020XX	CZ01 Floating Floor System	6'6" x 6'	Call for quote
CZ01FS2025XX	CZ01 Floating Floor System	6'6" x 8'	Call for quote
CZ01FS2030XX	CZ01 Floating Floor System	6'6" x 10'	Call for quote
CZ01FS2040XX	CZ01 Floating Floor System	6'6" x 12'	Call for quote

Color Availability:-

Decorative Colors
To mask the contamination

Solid Colors to Highlight the Contamination



Color Codes:

CO

TT

MN

SL

GR

RD



Contact ProSource for a quote at +1 (888) 247-0986 x2 or sales@team-prosource.com
www.team-prosource.com